

# Rain chain installation

June.21,2019


rain-1-01




- 1.** Mark the diameter of the downspout on the hook. The coating on the hook prevents electrochemical corrosion with the chain. Do not peel it off.



- 2.** Bend the hook so that it is parallel to the chain.

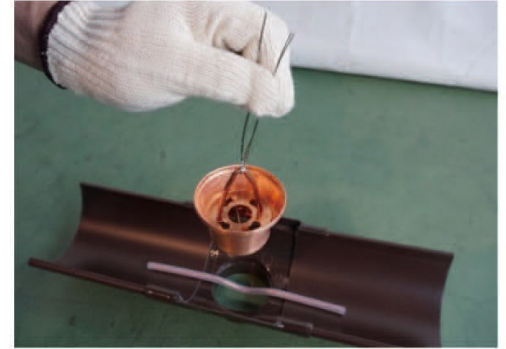


- 3.** Prepare to hang the first chain by attaching stainless steel wire to it.

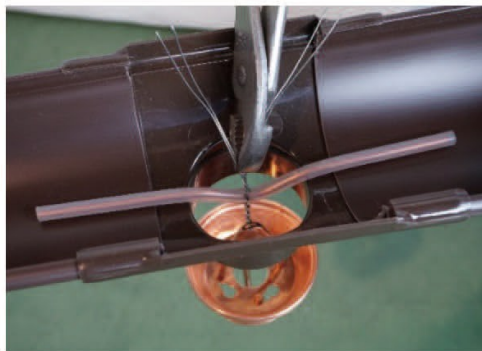

- 4.** Hang it as close to the spout as possible so that rain water does not splatter. It would be even better to crimp the downspout so that it tapers in.



- 5.** Attach the remaining chains a few at a time.

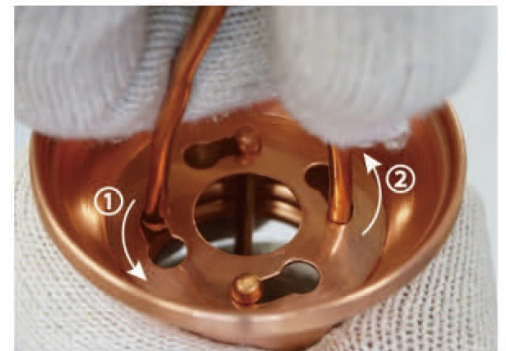

- 6.** When removing the connecting wire, remove one side at a time. Likewise, when attaching, screw in each side until it clicks in place.



- 7.** Connect all of the units. The connecting wire can fall into the holes, so lift it up to the correct place.



- 8.** Make a ring of stainless steel wire on the back of the decorative weight.




- 9.** Make a ring also on a somewhat large rock that will serve as a weight.



- 10.** After hanging the whole chain, connect the Decorative weight and the rock while checking to make sure that it is not too tight.



- 11.** Set the rock on the drain.

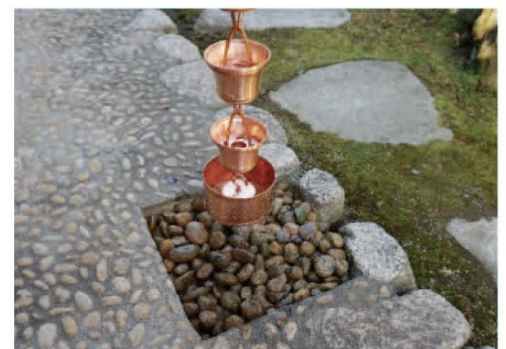

- 12.** Hide the rock with small stones.